



OPERATION INSTRUCTIONS for the ComfortGeni Model: Geni 4x

READ AND SAVE THESE INSTRUCTIONS AND IMPORTANT NOTICE

The ComfortGeni model Geni 4x will improve air flow in any room. It is best to adjust the Geni 4x at normal room temperature using the following instructions. Locate the register or location you plan to install the Geni 4x. Plug in the AC adaptor into a standard wall outlet and attach cord to Geni 4x

Setting Fan Speed:

- Turn the Function Switch to Fan
- Depress the Fan Speed Button to the desired speed, high, medium or low. It is recommended to start on high.

Setting for Heat:

- Turn Set Point control all the way to the left so the arrow points to the blue dot.
- Depress the Fan Speed button to the desired speed.
- Slowly turn the Set Point control to the right until the fans stop. The Geni 4x is now set for Heat function.
- Place the Geni 4x into the vent opening.
- The fans will automatically turn on and off


Setting for Cool:

- Turn Set Point control all the way to the right so the arrow points to the red dot.
- Depress the Fan Speed button to the desired speed.
- Slowly turn the Set Point control to the left until the fans stop. The Geni 4x is now set for Cool function.
- Place the Geni 4x into the vent opening.
- The fans will automatically turn on and off


Wall or ceiling installations can be achieved by drilling mounting holes as shown below.



Geni 4x Control Panel

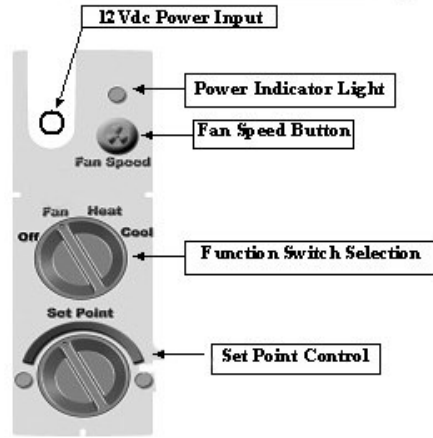

For moving air room-to-room or level-to-level consider using the duct kit accessory shown below. Follow local building codes regarding fire rated wall and ceiling installations. This accessory is sold separately.

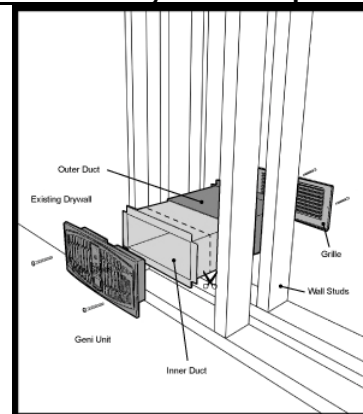

Room-to-Room Direct Flow Application

ONE YEAR LIMITED WARRANTY

Subject to the following limitations ComfortGeni LLC (manufacturer) warrants that the Geni 4x for one (1) year from date of original retail purchase, but not exceeding two (2) years from date of manufacture, remain free from appearance of defects in workmanship or materials.

This warranty is subject to the following limitations: (1) manufacturer's liability is limited to the replacement or repair of the unit, as decided by the manufacturer; (2) a defective unit must be returned, prepaid with proof of purchase; (3) This warranty does not apply to defects resulting from the alteration, abuse, accidental damage, unauthorized repair or misuse of the unit.

This warranty is given in lieu of all other warranties, guarantees and conditions on manufacturer's part and the manufacturer shall have no tortious or other liability in respect to this Geni 4x

By purchasing this product, the consumer agrees that, to the maximum extent permitted by law, ComfortGeni, LLC, is not responsible for direct, special, incidental, or consequential damages resulting from any breach of warranty or condition, or the consumer's use or misuse of the product, or under any other legal theory.

ComfortGeni LLC reserves the right to change product specifications without notice.

READ AND SAVE THESE INSTRUCTIONS



1. Your ComfortGeni will be as warm or cool as the air that is delivered from the heat or cooling source. The maximum temperature is 160F or 70C.
2. Do not, in any way, block the air grill of the ComfortGeni
3. Unplug the ComfortGeni when not in use. Turn the unit off before unplugging.
4. Do not operate the ComfortGeni with a damaged cord or if the unit malfunctions, becomes noisy when operating, has been dropped or otherwise damaged or if the housing is damaged or broken. Return the unit for inspection, replacement or repair.
5. The ComfortGeni should never be exposed to moisture. Avoid the use of the unit near an open window, bathroom or laundry area where it may come into contact with water.
6. The ComfortGeni is designed for indoor use only.
7. Place the ComfortGeni and the electrical cord where it will not be tripped over, out of the traffic pattern.
8. Never insert any object or allow any object to enter the ComfortGeni through the bottom or top grills, as this may damage the unit or cause it to malfunction.
9. Do not use the ComfortGeni near flammables such as gasoline, paint or natural gas.
10. The ComfortGeni is intended for use as described in the instructions only. Other use may cause fire, electrical shock, and damage to the unit or injury to persons and will void any warranty by the manufacturer.
11. If a 120V AC extension cord is required, use a UL approved cord.
12. Pressure on the bottom or top grills of the ComfortGeni may cause the fan blades to contact these grills and damage the unit.
13. Do not use strong detergents or flammable liquids to clean the ComfortGeni.
14. The housing of the ComfortGeni is sealed at the factory. THERE ARE NO SERVICEABLE PARTS INSIDE. Attempting to open the housing will void any and all warranty.

The ComfortGeni, Model Geni 4x should be installed in accordance with these instructions and where applicable, all local codes or in their absence in accordance with the latest editions of the International Residential Code and International Electrical Code.

**ComfortGeni LLC.
1427 W. 86th St. Suite 328
Indianapolis, IN 46260
www.comfortgeni.com
(317) 650-5348**

Optional trim adaptors enable the unit to fit 4"x12", 6"x10" or 6"x12" openings-floor, wall or ceiling. These accessories are sold separately.

4"x12" Adaptor

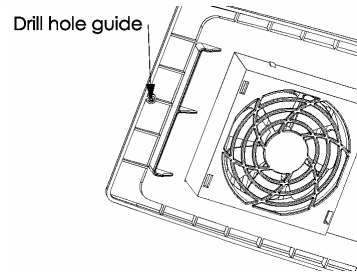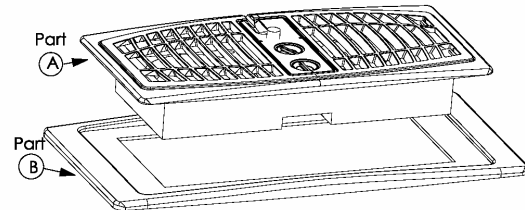

6"x10"-12" Adaptor

